

5021

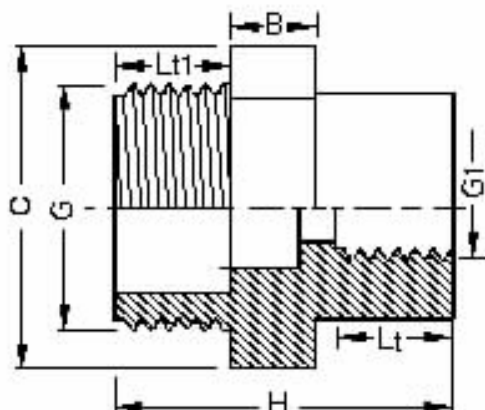
RIDUZIONE  
maschio/femminaPVC A PRESSIONE –  
RACCORDI  
Raccordi filettati

TABELLA DIMENSIONI

GXG1	C	B	Lt	Lt1	H	Peso gr.	PFA(PN)
1/2"X3/8"	30	12	13	16	40	17	16
3/4" X3/8"	36	12	13	17	41	18	16
3/4"X1/2"	36	12	17	17	45	21	16
1"X1/2"	36	12	17	19	47	29	16
1"X3/4"	36	12	18	19	48	30	16
1 1/4"X1/2"	46	16	17	22	53	52	16
1 1/4"X3/4"	46	16	18	22	54	52	16
1 1/4"X1"	50	16	20	22	58	62	16
1 1/2"X3/4"	50	16	18	22	54	61	16
1 1/2"X1"	50	16	22	22	59	99	16
1 1/2"X1 1/4"	50	16	20	22	58	68	16
2"X1"	65	16	20	26	62	105	16
2"X1 1/4"	65	16	22	26	63	109	16
2"X1 1/2"	65	16	22	26	63	109	16
2 1/2"X1 1/2"	80	20	26	30	66	163	16
2 1/2"X2"	80	20	22	30	68	170	16
3"X2"	95	20	26	33	72	223	16
3"X2 1/2"	95	20	29	33	76	254	16
4"X2 1/2"	120	20	29	41	84	400	16
4"X3"	120	20	33	41	86	406	16

**NOTE:**

Filettatura interna cilindrica UNI EN 10226 – a tenuta sul filetto

Filettatura esterna conica UNI EN 10226 – a tenuta sul filetto